


P/N 0248615

BATTERY COMPARTMENT

CHASSIS BATTERY

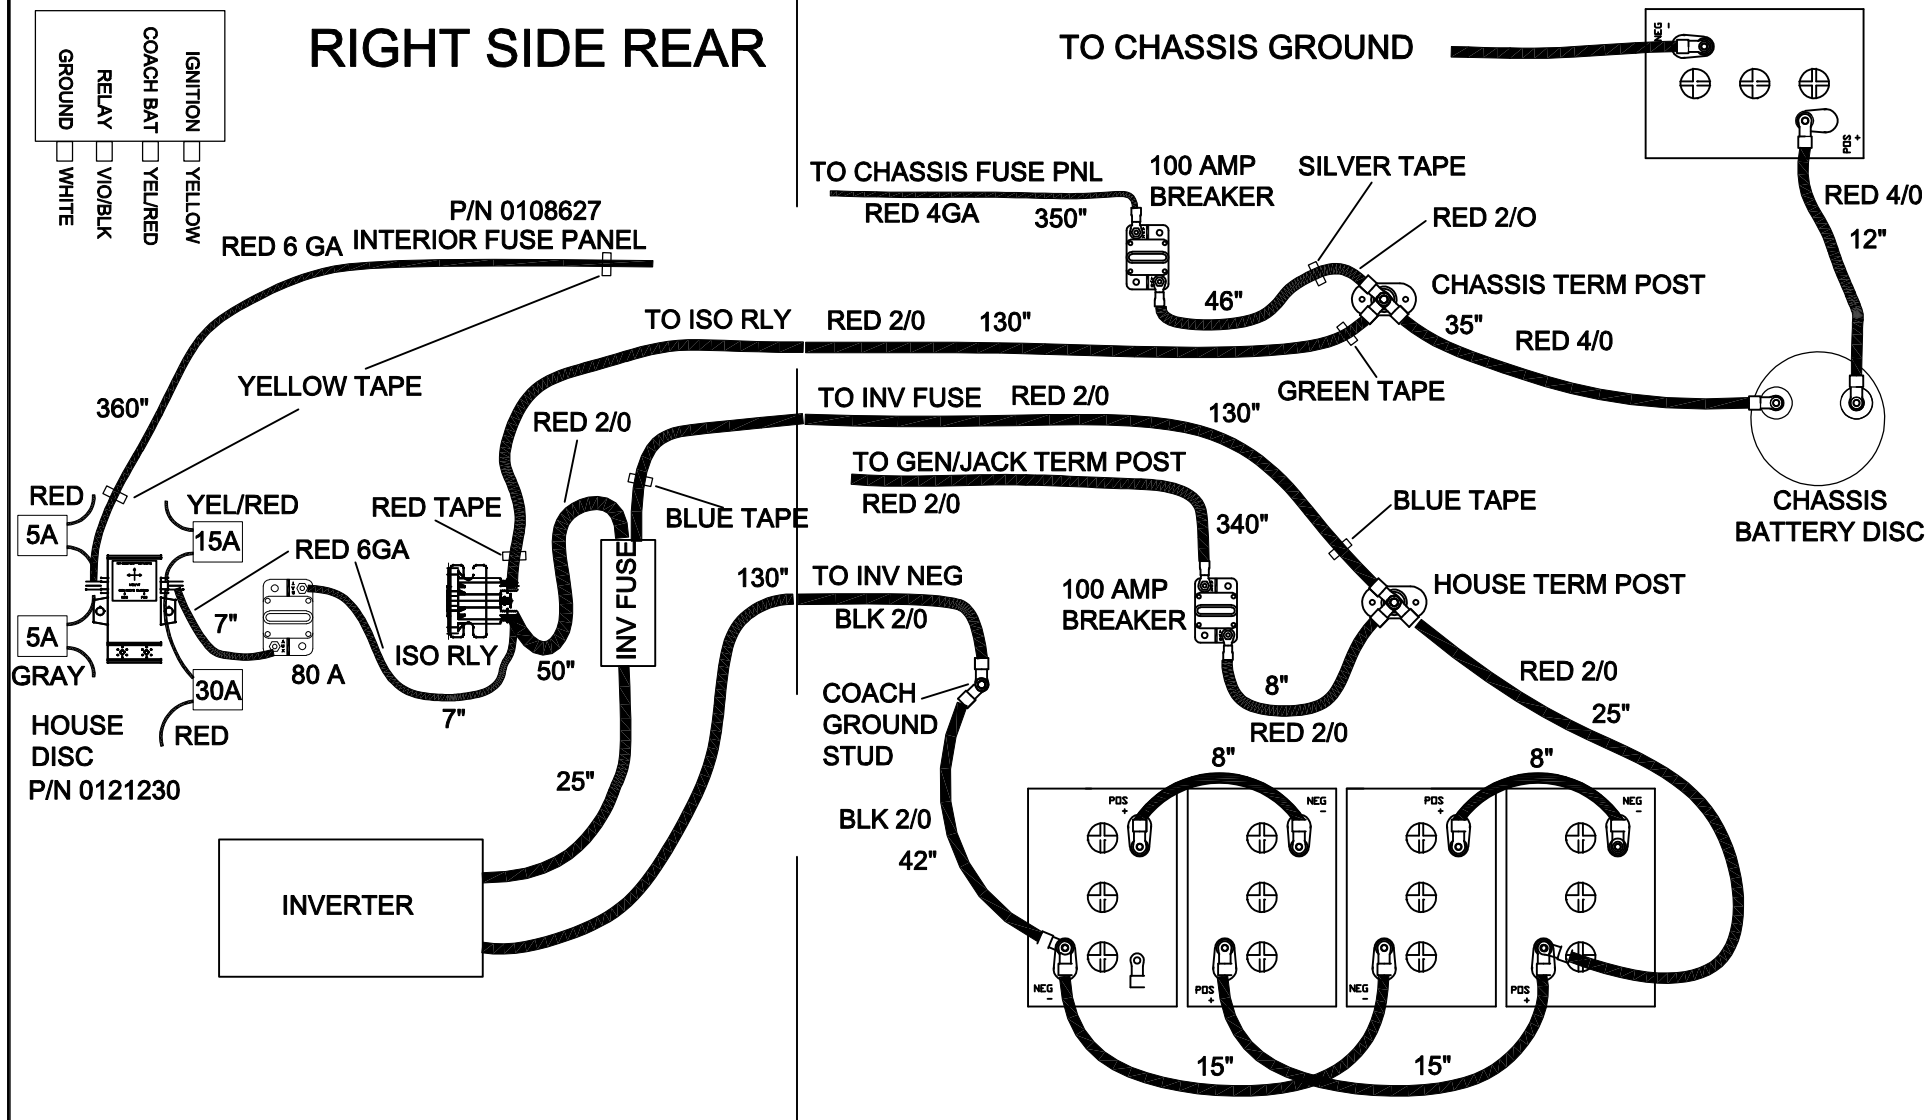

| REV | DESCRIPTION | DATE | BY | ECN | ALL CONNECTORS SHOWN ARE LOAD VIEW UNLESS OTHERWISE NOTED. ALL WIRE MUST BE 125°C UNLESS OTHERWISE NOTED. LOOM AS NOTED BY TOLERANCES: ± 1" ± 38" ± 2" > 38" REFERENCE TEE0122.XLS FOR CUTLIST | THOR MOTOR COACH | | |
|-----|---|----------|-----|------|---|---|------------------------|---------------|
| 1 | AFTER PROTO REVISIONS | 11/17/11 | ET | 8244 | | DRAWN BY | SHEET 1 OF 1 | DATE 10/25/11 |
| 2 | Shortened Black 2/0 wire to Coach Ground and Red 2/0 from Chassis Term Post for better fit. | 11/17/11 | CNE | — | | DESCRIPTION | RELAY/ BATTERY DIAGRAM | |
| — | | — | — | — | | MODEL | ZD 33.1 | |
| 3 | ADDED CHASSIS BATTERY AND CHASSIS DISCONNECT SWITCH TO PRINT | 09/21/12 | DRC | — | | © CONFIDENTIAL AND PROPRIETARY INFORMATION OF THOR MOTOR COACH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT OUR EXPRESSED WRITTEN CONSENT IS PROHIBITED. | DRAWING NUMBER | TEE 0122 |
| 4 | ADDED 18" to 2/0 WIRE FROM CHASSIS TERM POST TO BREAKER | 11/14/12 | DRC | 9270 | | REVISION | 5 | |
| 5 | ADD FRONT BUNK 30 AMP FUSE SLD PWR TO NON-DISCONNECT SIDE OF BATTERY | 1/8/12 | ET | 9357 | | | | |
| | | | | | SPECIAL NOTES: | | | |

